

309

B4

- d) It was agreed in the last meeting while the Director of the Zoo delivered a presentation that all ungulates should be brought together, therefore Spotted deer and Barking deer to be shifted near other ungulates on place of Sikka deer and Swamp deer.
- e) Aviaries number 44 -51 should be shifted to present area for the Spotted deer and Barking deer.
- f) Existing area for aviaries (44 to 51 numbers) to be kept green.
- g) Flight birds should be kept in large aviary by merging small aviaries.
- h) The rescued area at S. No. 69 should be screened by planting trees.

Amended copy of the Master (layout) Plan should be submitted for ratification.

6. Master Plan of the Madras Crocodile Bank Trust, Mamallapuram, Tamil Nadu

It was decided to send the copy of the Master plan to the coordinator for the scrutiny.

Agenda Item No. 2 Construction of animal exhibits

I. M. C. Zoological Park, Chhatbir, Punjab

1. Pheasantry to be redone after demolition

The design was scrutinized and conceptually approved, however the following observations were made:-

- a) The size of the each aviary in Pheasantry should be increased to 80 mt. (10 mt depth, 8 mt. width).
- b) It should be ensure that the visitors to see one species at a time, therefore green buffer at the corners should be provided.
- c) The wall of the houses should be comflauged appropriately.

2. Upgradation of Wildlife hospital

The design was scrutinized and not approved, however following observations were made:-

- a) Carnivore do not have open air kraal, thus three kraal should be constructed even after breaking the wall if required.
- b) Atleast 10ft. green screening should be provide between carnivore and herbivore enclosures.
- c) No more herbivore cells are needed on the eastern side as proposed, the same should be modified to birds enclosure.
- d) No new proposal of birds.
- e) Artificial shelters are not required for herbivore in paddock, instead trees may be planted to provide shade.

3. Raising the height of zoo boundary wall

The design was scrutinized and not approved, however following observations were made:-

- a) While raising the wall of the boundary wall it also necessary that the residential colony should be separated by 2 mt. high and the residential colony should have a separate entry to it.
- b) The design of the wall found to be not appropriate.
- c) The minimum height of the wall should be 2 mts.
- d) The fencing wire as proposed does not serve the purpose of wall, however the zoo may have barbed wire by fencing supported by angle iron of appropriate size at an angle of 120 degree towards the zoo side.
- e) CCTV layout should be prepared on the need based and the area of vulnerability.
- f) Keep a provision of inspection path all along boundary wall.

Rectified on the map/ plan etc as suggested above may be collected.

II. **Sanjay Gandhi Biological Park, Patna, Bihar**

1. Construction of Leopard enclosure

The proposal will be taken up once the reply to the CZA's comments have been received from the zoo.

2. Construction of 5500 feet long chain-link fencing between Patna Golf Club and Zoo.

The design was scrutinized and not approved, however the following observations were made:-

- a) Foundation of the boundary wall should not be more than in 1mt. depth.
- b) Dwarf wall above ground should not be above 0.60 mt. in height.
- c) Chain-link mesh above the dwarf wall should be supported by the angle iron of appropriate size.
- d) No pillars would be necessary above dwarf wall.

The design should be revised and re-submitted along with the estimates for its scrutiny and approval.

304 (186)

Subject: **Minutes of the 48th meeting of the Expert Group on Zoo Designing of Central Zoo Authority held on 3rd February, 2014.**

Date: 06/02/14 05:22 PM
From: Central Zoo Authority <cza@nic.in>

To: chatbir zoo <mcpchhatbir@gmail.com>
Cc: PUNJAB CCF(WL) & CWLW <cwlwpunjab@sify.com>

extract of the minutes of the meeting.docx (15KB)

No.7-3/2014-CZA

Date : 6.2.2014

To

1. The Director, Chhatbir Zoo, Punjab

Sub : Minutes of the 48th meeting of the Expert Group on Zoo Designing of Central Zoo Authority held on 3rd February,2014.

Sir,

Please find herewith a part of the minutes of the meeting held on 3rd February,2014 in CZA office wherein the subject pertaining to your zoos was discussed/ scrutinized and necessary suggestions were put forward as approval/ not approved with suggestions and modifications. You are, therefore, asked to revise/ resubmit as per suggestions made thereof and submit for necessary action.

This is for information and necessary action.

An early action is appreciated.

Yours faithfully,

(B.S.Bonal)
Member Secretary

Encl : As stated.

Copy to : The Chief Wild Life Warden/ Municipal Commissioner of concerned States. (Punjab)

Central Zoo Authority
Annexe 6, Bikaner House,
Shahjahan Road , New Delhi, India - 110003
Phone : 91-11-23381585, 23070375
Fax : 91-11-23386012
Website : cza.nic.in


To. CZA

304

172

Sr No. 1 = 1 (1-5)

PROPOSED PHESANTRY AT CHHATBIR ZOO

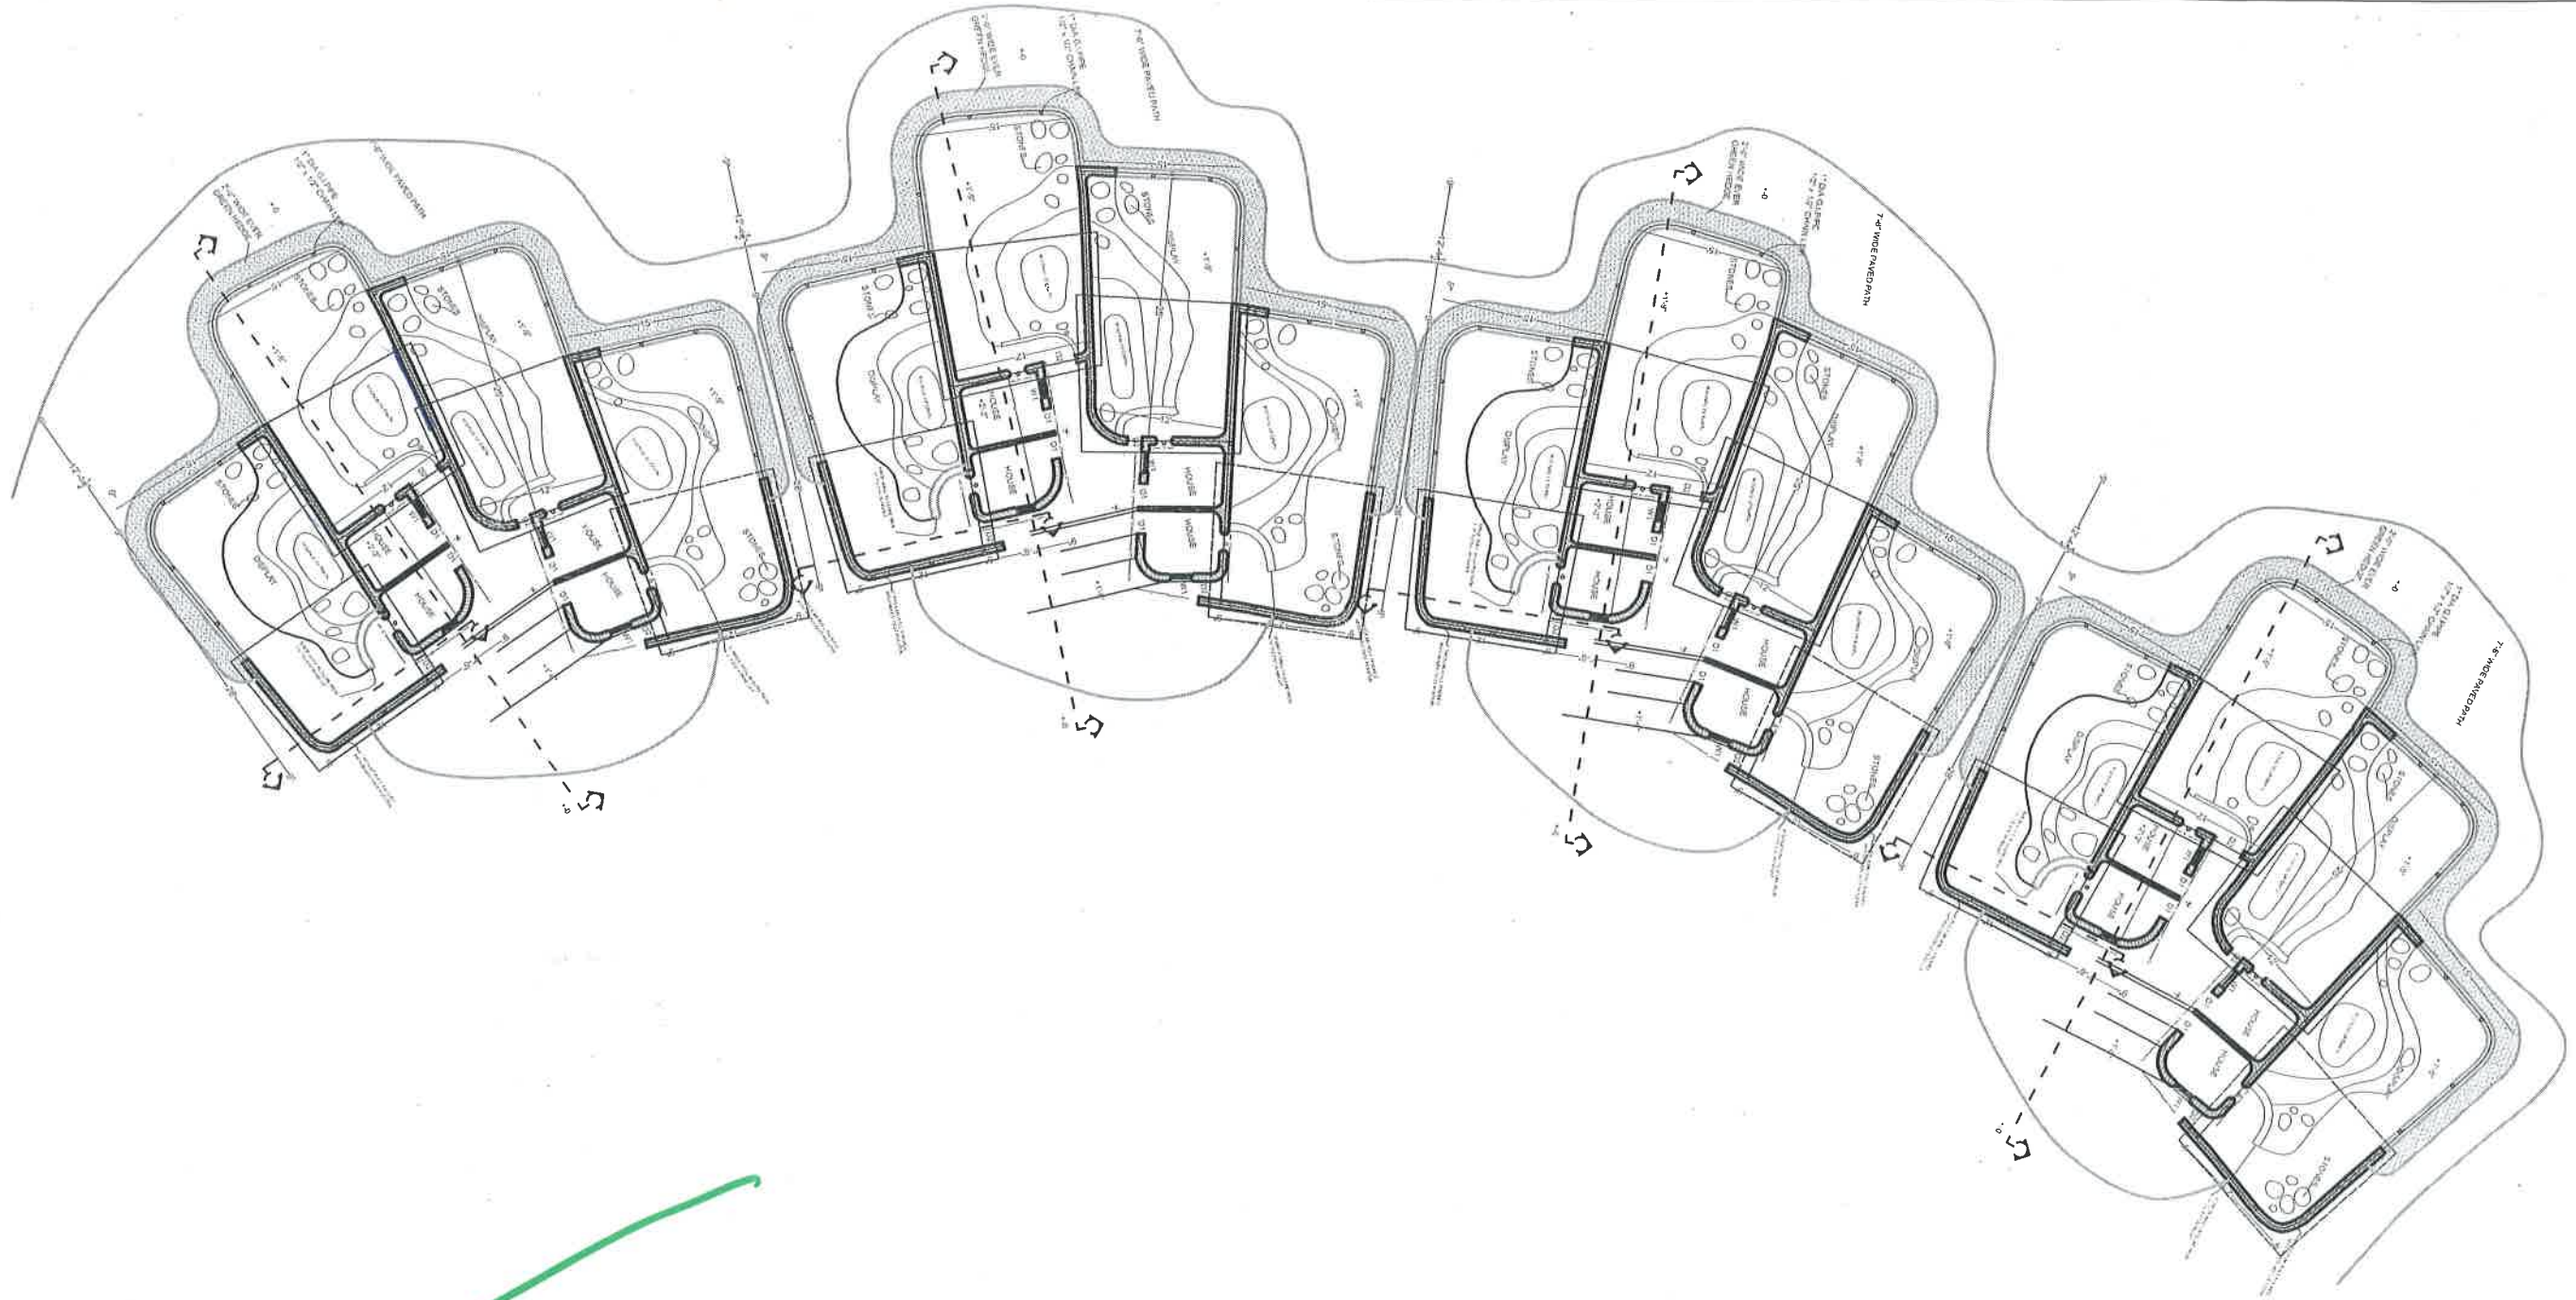

Sr.no-1 = (2-125)

PROPOSED PHESANTRY SINGLE UNIT

173

304

984 = 35

PLAN



Walls should be Camry/Alloy


Planting

9000

Sr.no-1 = 3(1-5)

174


309

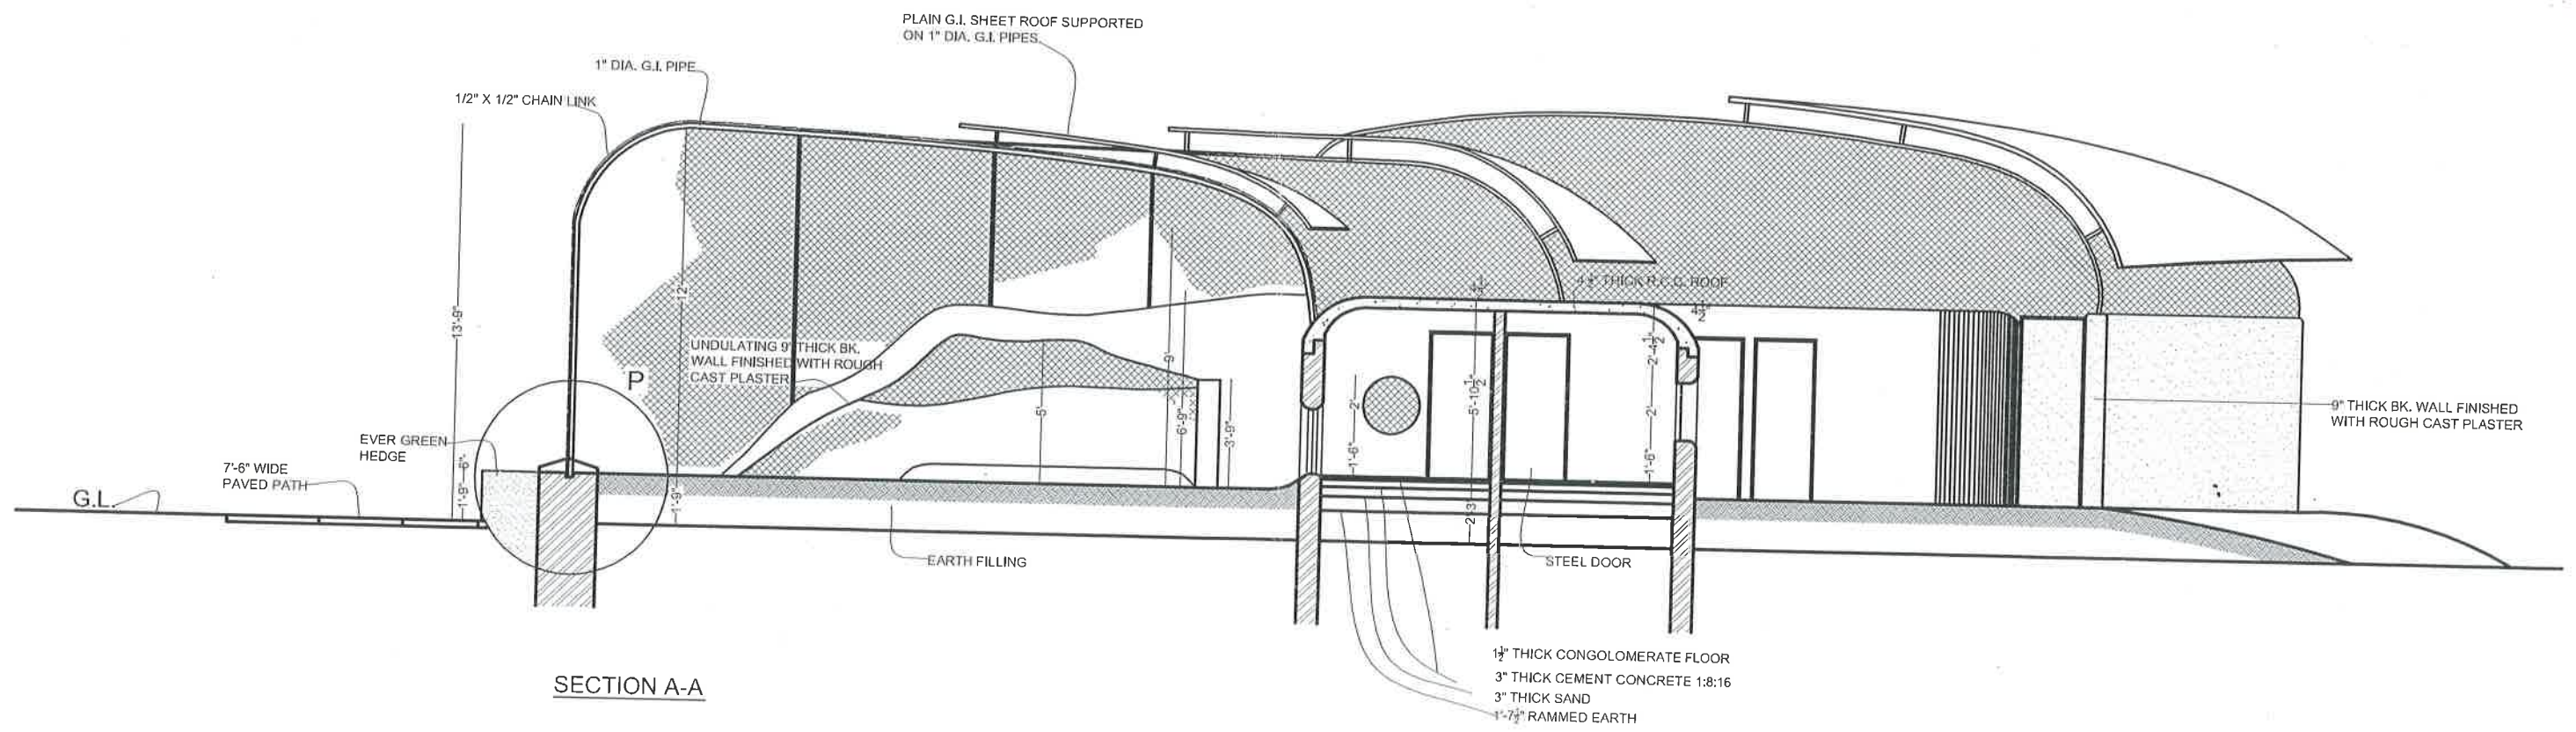

Sr. no 1 = (4-1-5)

175

304

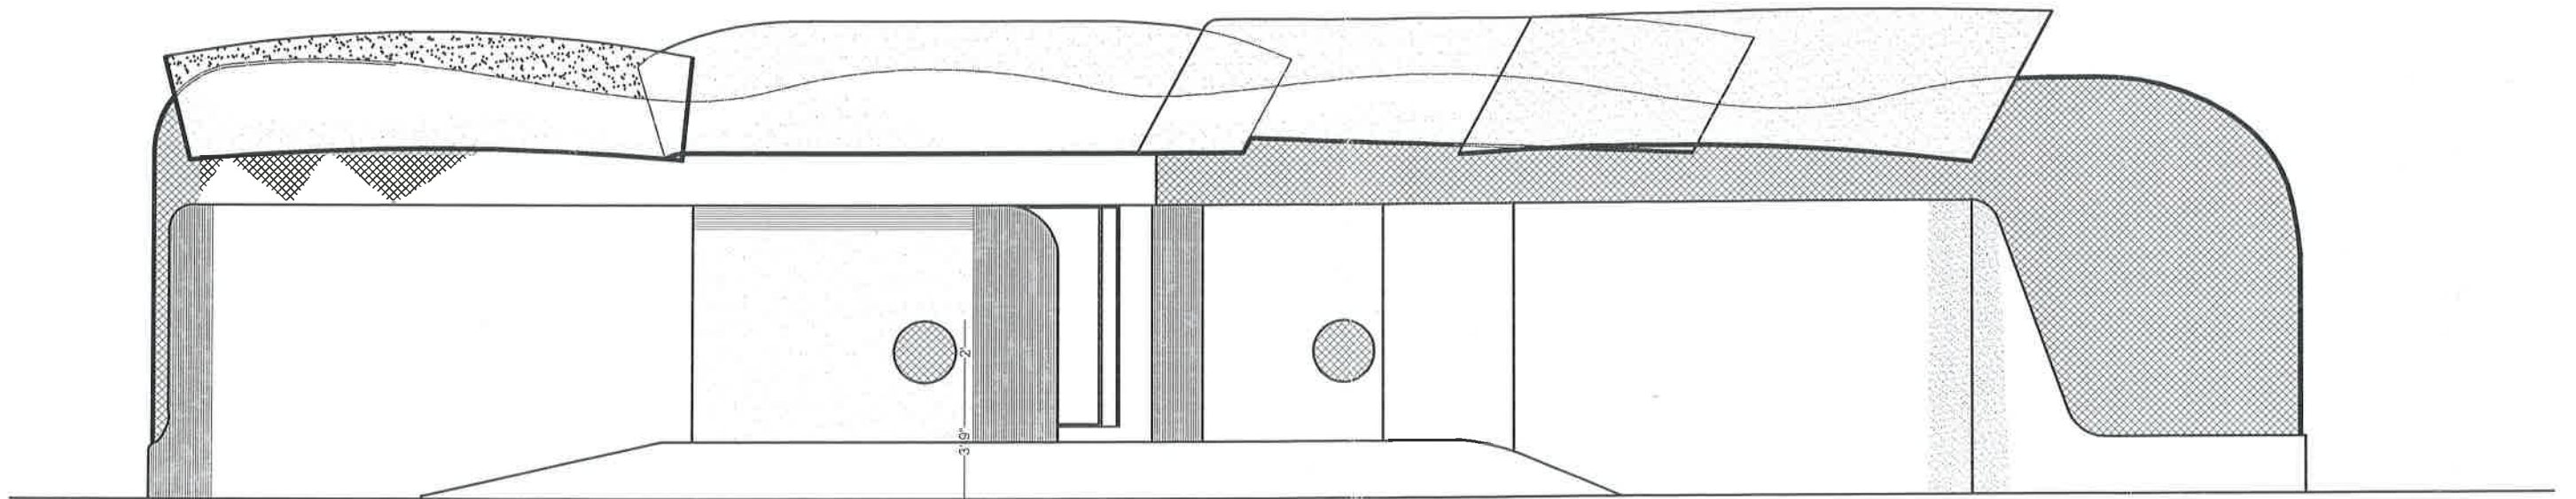


REAR ELEVATION


Sr.no 1 = (5 (1-5))

176

304

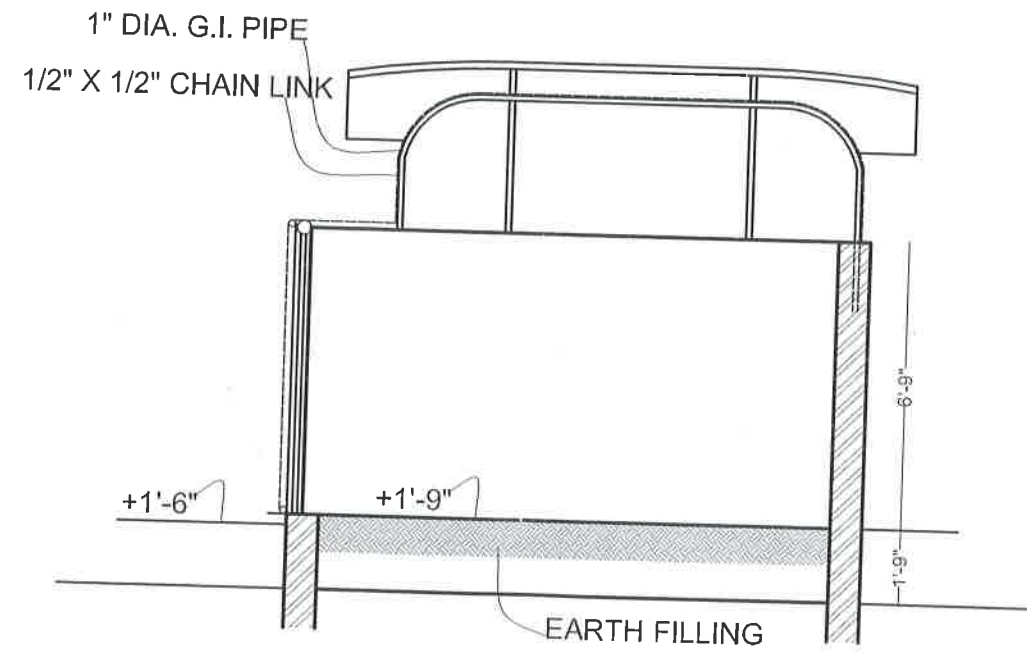

SECTION B-B

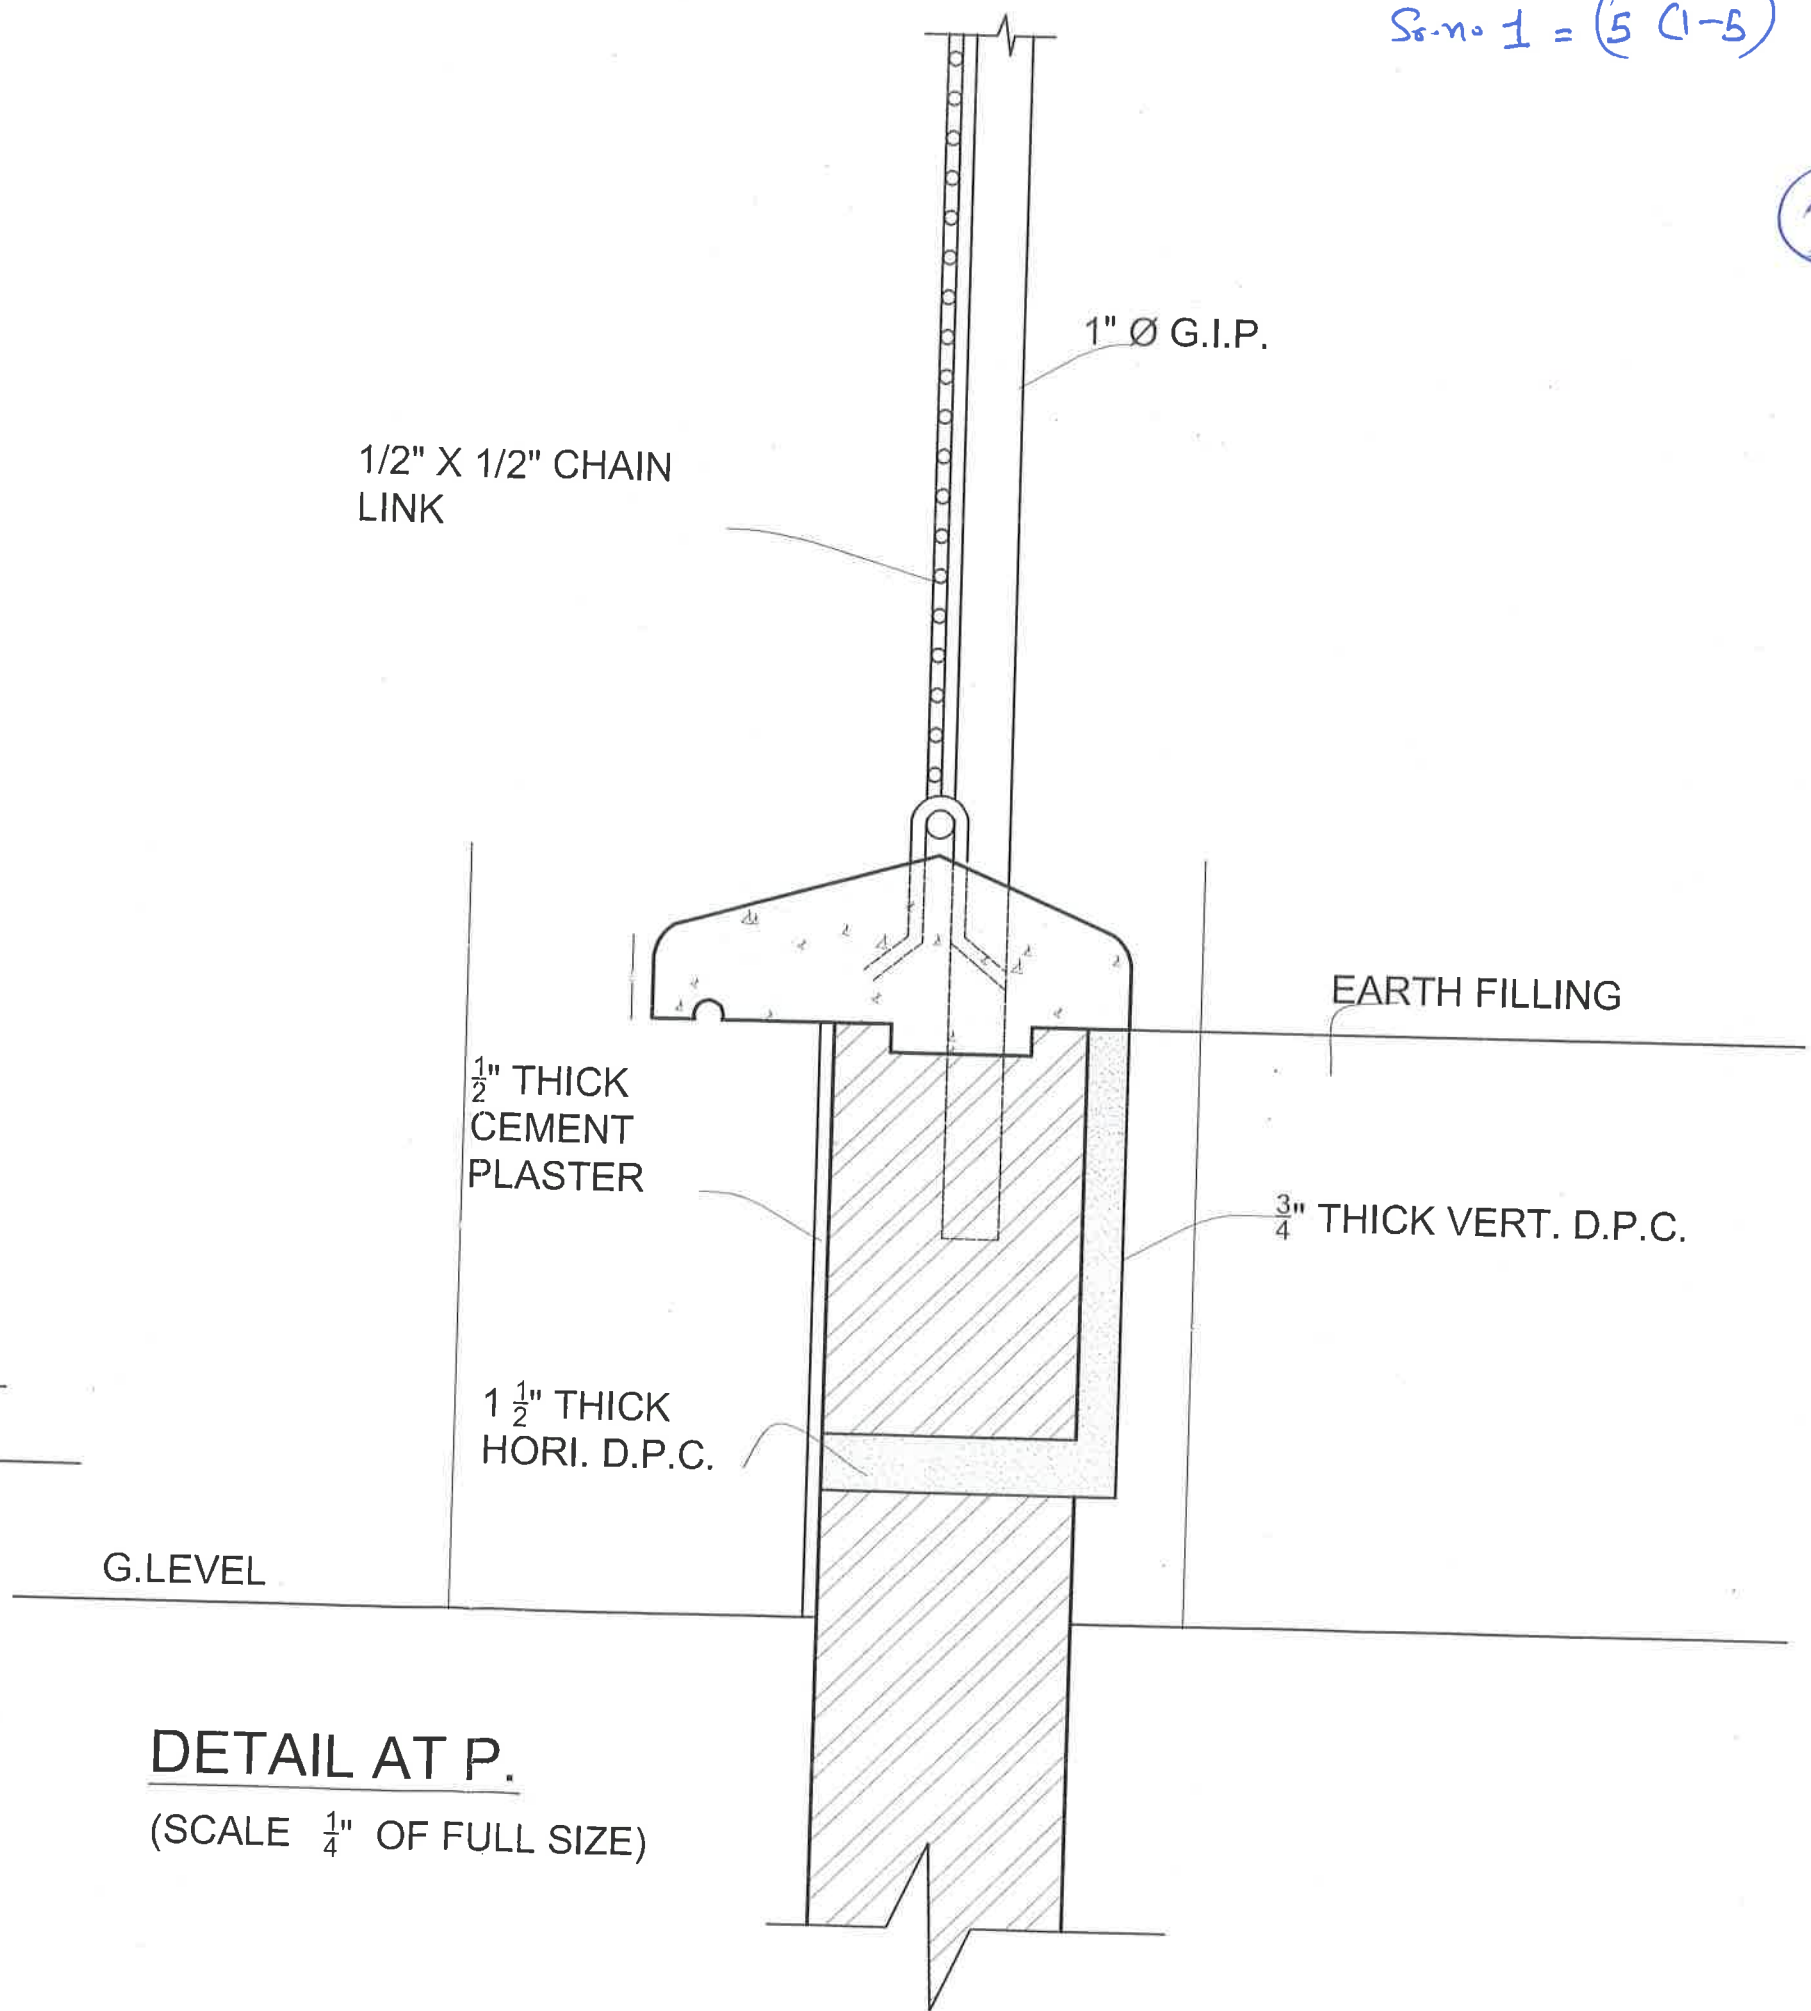

DETAIL AT P.

(SCALE 1/4" OF FULL SIZE)